




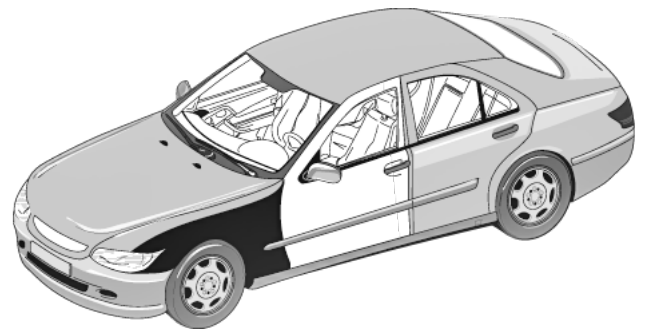
Blend-in Refinishing System 55 Line Glasurit® Basecoat



Properties:





In principle, panel repairs with metallic basecoat/clearcoat systems are possible, and, as a rule, it is not necessary to re spray adjacent body parts. When colour differences beyond allowable limits are to be expected and when the areas to be re sprayed are not limited by trim strips or edges, the more appropriate method to overcome colour differences may be to blend in the damaged area and the adjacent part, if required. This procedure can be considerably more efficient and economical than time-consuming colour matching.


Blending-in on the adjacent panel



541-5 Glasurit® Wax and Silicone Remover	 1 x	 wipe dry	563-808 Glasurit® Flattening Paste	 563-808 + sanding pad
---	--	---	---	--




541-5 Glasurit® Wax and Silicone Remover	 1 x	 wipe dry
---	--	---

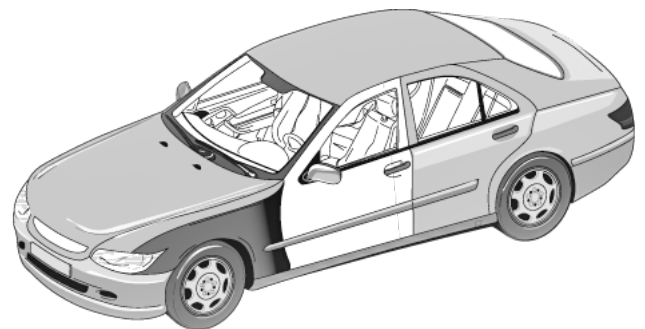55 Line Glasurit® Basecoat	 2 : 1 352-50, -91	 HVLP 1.3 mm 2.0-3.0 bar	 1	 Flash off until matt
-----------------------------------	--	--	--	---



55-B500 Glasurit® Blending Clear	 HVLP 1.3 mm 2.0-3.0 bar	 1
---	--	--

Not required in case of 55 Line Solid Colour Basecoat.

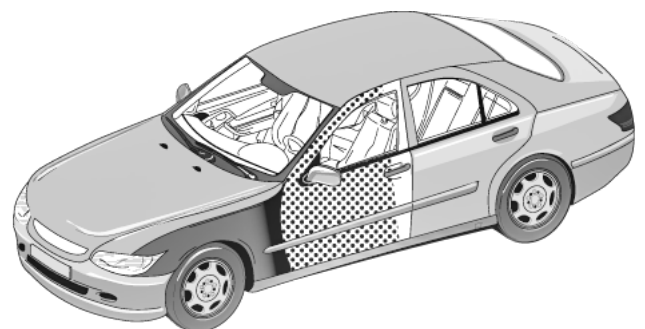

Safety advice:

The products are suitable for professional use only.

It cannot be ruled out that this product contains particles < 0.1 µm.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at <http://techinfo.glasurit.com> or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

Blend-in Refinishing System 55 Line Glasurit® Basecoat

55 Line Glasurit® Basecoat




2 : 1
352-50,
-91



HVLP
1.3 mm
1.5-2.0 bar



1 fading
out on
both
panels

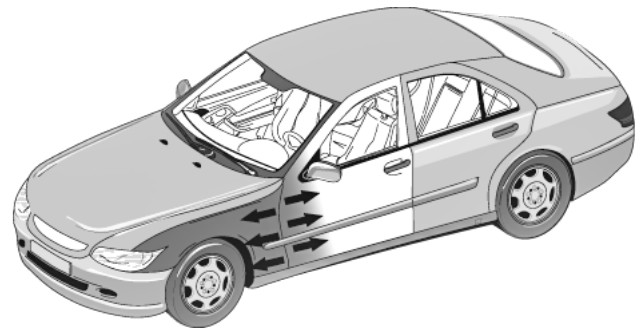

55 Line Glasurit® Basecoat



2 : 1
352-50,
-91




HVLP
1.3 mm
2.0-3.0 bar



1 fading
out
towards
the edge
of the
panel



flash off
until matt

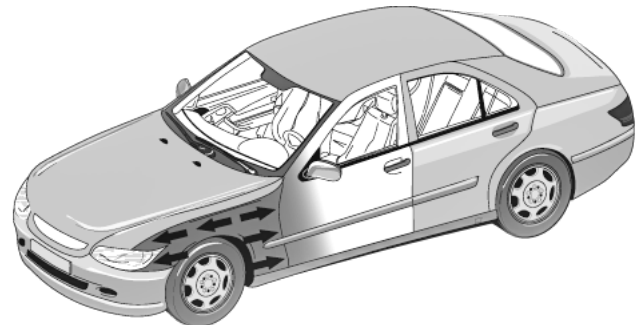

55 Line Glasurit® Basecoat




2 : 1
352-50,
-91



HVLP
1.3 mm
0.8-1.5 bar



1/2 fading
out on
both
panels

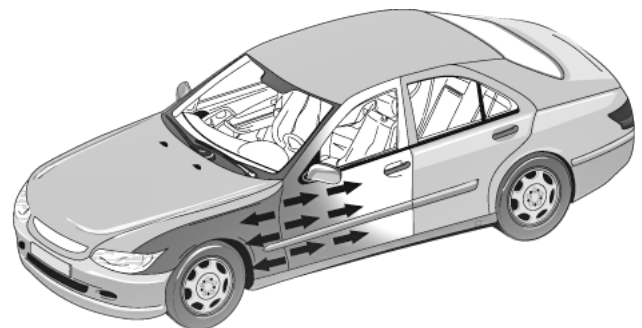

55 Line Glasurit® Basecoat




2 : 1
352-50,
-91



HVLP
1.3 mm
2.0-3.0 bar



1/2 to
match
effect

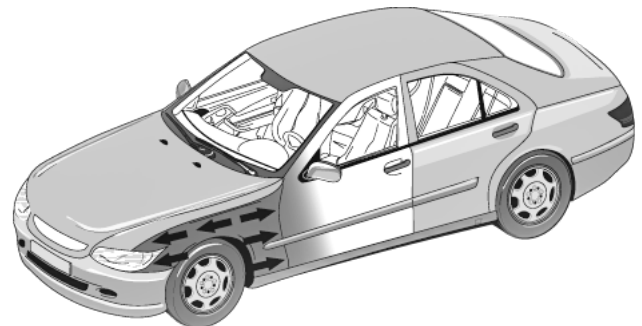





Safety advice:


The products are suitable for professional use only.

It cannot be ruled out that this product contains particles < 0.1 µm.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at <http://techinfo.glasurit.com> or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

Blend-in Refinishing System 55 Line Glasurit® Basecoat

923- Glasurit® MS / HS Clear	 Refer to the technical data sheet	 HVLP 1.3 mm 2.0-3.0 bar	 1 - 2	 30 min. at 60 °C
---	---	--	--	--

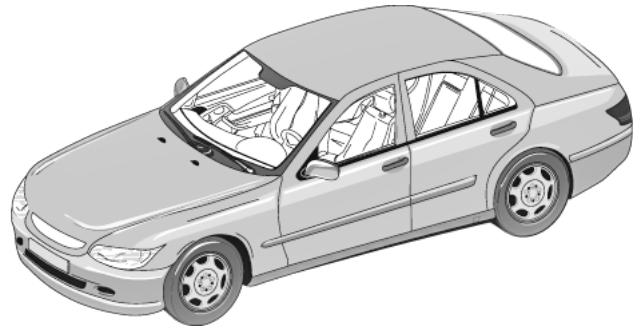

Safety advice:

The products are suitable for professional use only.

It cannot be ruled out that this product contains particles < 0.1 µm.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at <http://techinfo.glasurit.com> or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

